


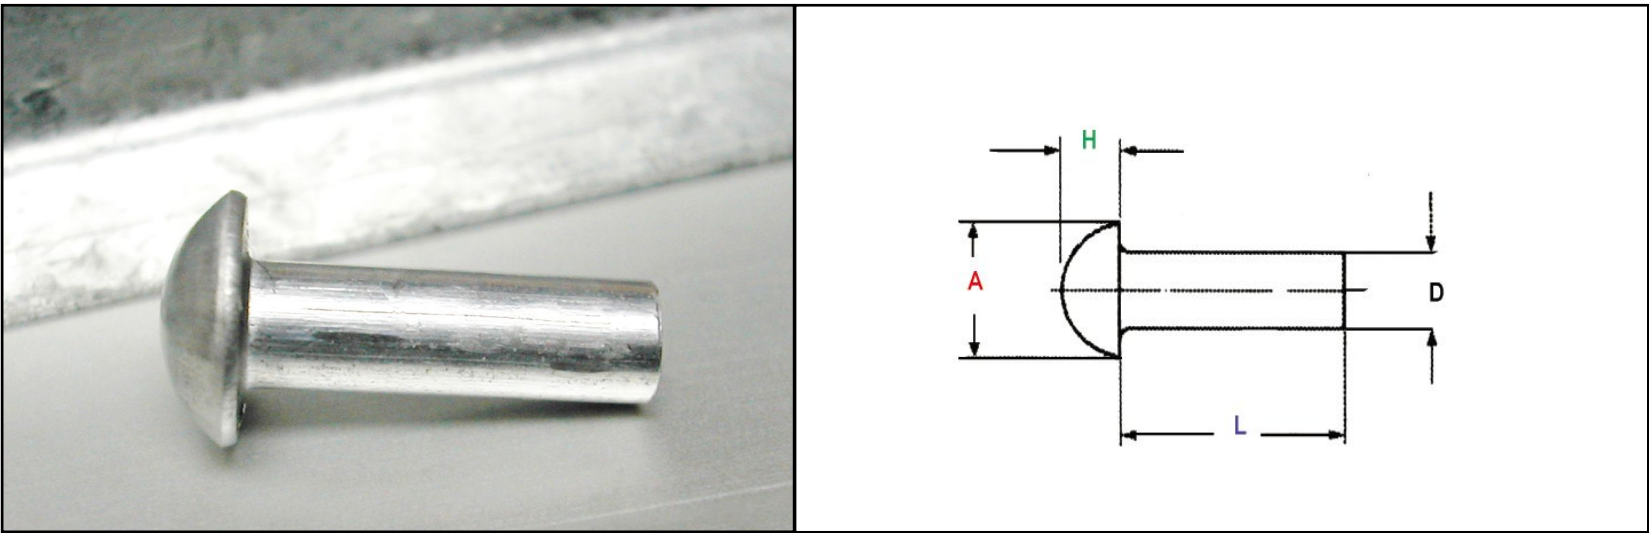

REMACHE DE ALUMINIO CABEZA REDONDA

Código	Diámetro "D" mm	Largo "L" mm	Envase	Diámetro "A", mm	Altura "H" Cabeza, mm	Rango de Agarre, mm	Diámetro Broca, mm	Resistencia, kg Cizalle
01RAR	2,0	4	1.000 U	4.0	1.3	1,2 - 2,0	2.2	40
02RAR		6				3,2 - 4,0		
03RAR		8				5,2 - 6,0		
04RAR		10				7,2 - 8,0		
05RAR	2,5	4	1.000 U	5.2	1.6	0,5 - 1,5	2.7	62
06RAR		6				2,5 - 3,5		
07RAR		8				4,5 - 5,5		
08RAR		10				6,5 - 7,5		
09RAR	3,0	6	500 U	6.0	1.9	1,8 - 3,0	3.2	90
10RAR		8				3,8 - 5,0		
11RAR		10				5,8 - 7,0		
12RAR		13				8,8 - 10,0		
13RAR		16				11,8 - 13,0		
14RAR		19				14,8 - 16,0		
15RAR	3,5	6	500 U	7.0	2.3	1,0 - 2,5	3.7	125
16RAR		8				3,0 - 4,5		
17RAR		10				5,0 - 6,5		
18RAR		13				8,0 - 9,5		
19RAR		16				11,0 - 12,5		
20RAR		19				14,0 - 15,5		
21RAR	4,0	6	100 U	8.0	2.6	0,3 - 2,0	4.2	160
22RAR		8				2,3 - 4,0		
23RAR		10				4,3 - 6,0		
24RAR		13				7,3 - 9,0		
25RAR		16				10,3 - 12,0		
26RAR		19				13,3 - 15,0		
27RAR		25				19,3 - 21,0		
28RAR	4,5	6	100 U	9.0	2.9	-0,5 - 1,5	4.7	200
29RAR		8				1,6 - 3,5		
30RAR		10				3,6 - 5,5		
31RAR		13				6,6 - 8,5		
32RAR		16				9,6 - 11,5		
33RAR		19				12,6 - 14,5		
34RAR		25				18,6 - 20,5		
35RAR	5,0	8	100 U	10.0	3.2	0,9 - 3,0	5.2	250
36RAR		10				2,9 - 5,0		
37RAR		13				5,9 - 8,0		
38RAR		16				8,9 - 11,0		
39RAR		19				11,9 - 14,0		
40RAR		25				17,9 - 20,0		
41RAR	6,0	10	100 U	12.0	3.9	1,5 - 4,0	6.2	360
42RAR		13				4,5 - 7,0		
43RAR		16				7,5 - 10,0		
44RAR		19				10,5 - 13,0		
45RAR		25				16,5 - 19,0		
46RAR		30				21,5 - 24,0		